


TERMORESISTENZA PT100 AD ISOLAMENTO MINERALE (MgO) CON IMPUGNATURA PT100 THERMAL RESISTANCE WITH MINERAL- INSULATED (MgO) WITH HANDGRIP

TOLLERANZA ELEMENTO SENSIBILE (IEC 751)
SENSIBLE ELEMENT ACCURACY (IEC 751)

Classe "B" ($\pm 0.3^{\circ}\text{C}$ a 0°C)	0
Classe "A" ($\pm 0.15^{\circ}\text{C}$ a 0°C)	3

Limiti di temperatura / Temperature limits
 -70°C / $+500^{\circ}\text{C}$

 Immersione minima 40 mm.
Minimum immersion 40 mm.

DIAMETRO GUAINA
SHEATH DIAMETER

	ϕA
30	3 mm.
60	6 mm.

LUNGHEZZA (L1)
LENGTH (L1)

	L1 = mm.
01	50 mm.
02	100 mm.
03	150 mm.
04	200 mm.
05	250 mm.
06	300 mm.
07	350 mm.
08	400 mm.
09	450 mm.
10	500 mm.
11	550 mm.
12	600 mm.
13	650 mm.
14	700 mm.
15	750 mm.
16	800 mm.
17	850 mm.
18	900 mm.
19	950 mm.
20	1000 mm.
22	1100 mm.
24	1200 mm.
26	1300 mm.
28	1400 mm.
30	1500 mm.
32	1600 mm.
34	1700 mm.
36	1800 mm.
38	1900 mm.
40	2000 mm.
42	2100 mm.
44	2200 mm.
46	2300 mm.
48	2400 mm.
50	2500 mm.
52	2600 mm.
54	2700 mm.
56	2800 mm.
58	2900 mm.
60	3000 mm.

Cod.


3	4	4	5
---	---	---	---

 .

7		1
---	--	---

 .

--	--	--	--

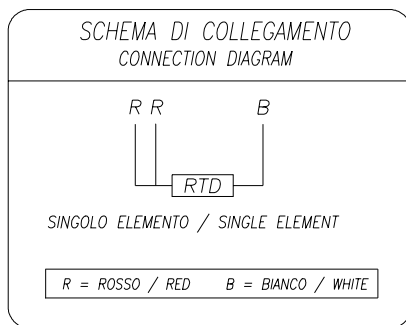

CAVO USCENTE IN GOMMA SILICONE
SILICONED RUBBER OUTLET CABLE

SPELATURA + FILI USCENTI
STRIPPING (OUTLET WIRES)

IMPUGNATURA PVC
HANDLE PVC

OSSIDO DI MAGNESIO COMPRESSO
COMPRESSED MAGNESIUM OXIDE

ELEMENTO SENSIBILE (RTD)
SENSIBLE ELEMENT

A = GUAINA ESTERNA (AISI 316)
OUTSIDE SHEATH

PASSACAVO
CORE HITCH

